

MECHANICAL EQUIPMENT

Products

Friction Linings

MZ GOLD

Ferotec Friction Ltd

MZGOLD Product Data Sheet

General Description

MZ Gold is a solid woven friction material. It is based on yarn spun from a blend of fiberglass and synthetic fibres together with fine brass wires to enhance its strength and heat dissipation properties. The impregnant has been specially developed to give it good frictional properties combined with a fair degree of flexibility. It has a high coefficient of friction with excellent fade resistance and is particularly suitable for mine winder brakes. It is recommended for operation in oil immersed applications. To help during fitting to brake shoes and bands it can be softened and made more pliable by warming in a bonding oven to between 150 & 180°C for sufficient time for the heat to penetrate the fabric.

Applications

Industrial drum and band brake linings
Mine winder brake linings

Bonding

MZGOLD may be bonded using any of the established adhesives recommended for friction material. However, to obtain the best results it is necessary to use a thermosetting adhesive.

Mating Surface

A good quality, fine grained, pearlitic cast iron or cold rolled steel with a Brinell hardness of 180. Cast steels are not recommended.

Availability

Roll		Sheet
Length	10.0 Metres	Sheet size 1000mm x 660mm x 3.2mm to 12.7mm thick
Width	20 to 510mm	
Thickness range	3.2mm to 12.7mm	Linings and special shapes available on request

TECHNICAL DATA

Friction

μ for design purposes :	Normal	0.50
	Hot	0.48
	Static @ 100°C	0.48
	Static @ 200°C	0.42

Recommended Operating Range

Pressure	Dynamic	0.1—1.00 MPa
Max. rubbing speed	25 m/s	
Max. continuous temperature	150°C	
Max. intermittent temperature	200°C	
Max. temperature	300°C	

PHYSICAL PROPERTIES

Density (SAE J380)	1.36-1.42 g/cc
Ultimate tensile strength	TBD
Ultimate compressive strength	135 MPa
Ultimate shear strength	TBD
Wear Rate in ³ /hp-hr	0.086

(All physical properties shown above are all mean values)

The information supplied in this data sheet is believed to be accurate and reliable, and was obtained by scientific and laboratory testing. However, since actual conditions of use are largely outside the control of FEROTEC FRICTION LIMITED, it is suggested that this material be thoroughly tested and its suitability for use be determined before final acceptance.

Issue 4 Jun 10

Represented by ACTOM Mechanical Equipment Tel : 011 8783000 Fax : 011 8783001

Ferotec Friction Ltd

Unit C Greenfield Business Park, Bagillt Rd, Holywell, Flintshire CH8 7HJ, United Kingdom

Tel: +44 1352 710360



Fax: +44 1352 719368

E-mail: ffsales@ferotecfriction.co.uk

Website: www.ferotecfriction.com

Ferotec Friction Ltd

MZGOLD Product Data Sheet

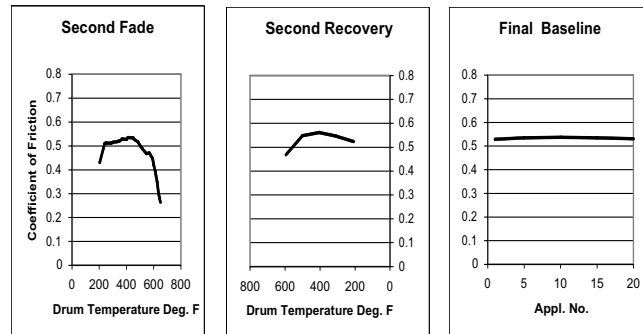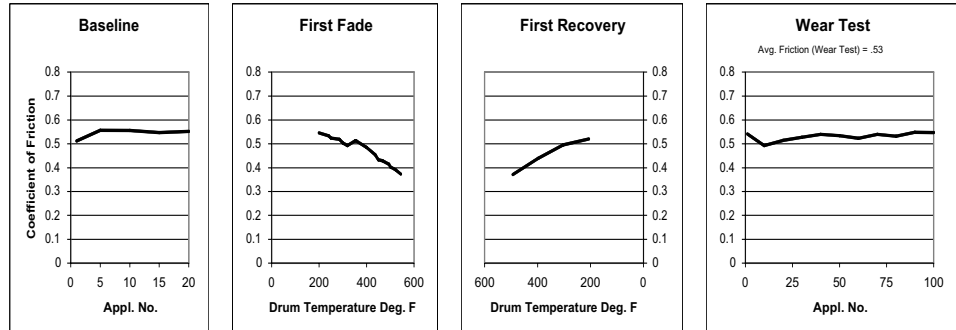

SAE J661A (150 PSI)

Material Type
 Test No. 25-09
 Date 04/09/09
 Material MZGOLD (Catali)
 Lot
 Reference

	Wear Data	
	Weight	Thickness
	Grams	Inches
Start	4.950	0.219
Finish	4.620	0.196
Loss	0.330	0.023
%	6.67	10.52
Ave. Fric - N	0.50 G	
Ave. Fric - H	0.48 G	
Cu in/Hp hr	0.0086	

Represented by
 ACTOM Mechanical Equipment
 Tel : 011 8716789 Fax : 011 8716677